
Datasheet

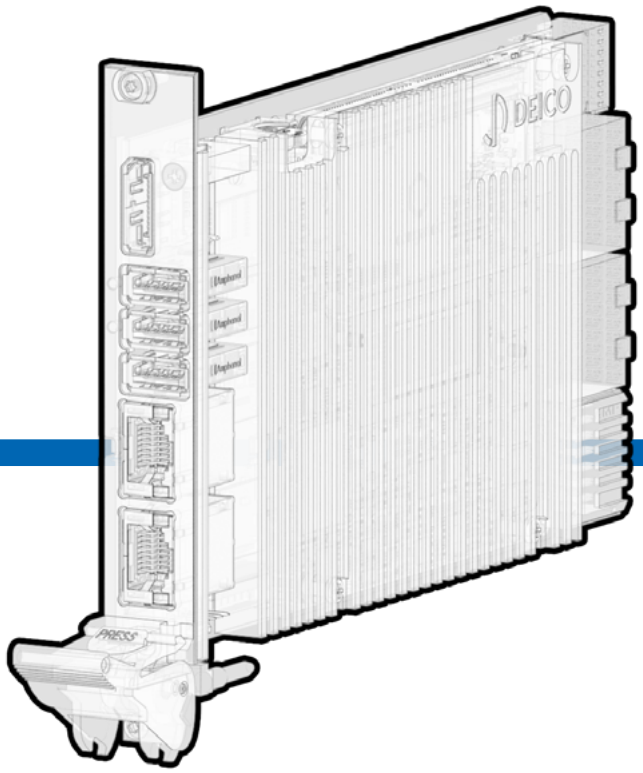

DE140110

PXIe Controller Module

COMe Type 6 Compact

DEICO

www.deico.com.tr

Contents

1. Description 1

1.1. Key Features 1

2. Hardware Overview 2

2.1. Functional Block Diagram 2

2.2. Hardware Specifications 3

2.2.1. Electrical 3

2.2.2. Features 3

2.2.3. Physical 4

2.2.4. Environmental 4

3. Software Overview 4

4. Signal Connections 4

4.1. LED Indicators 4

5. Safety Guidelines 5

6. Compatibility Guidelines 6

7. Supporting Products & Software 6

1. Description

PXIe Controller Module COMe Type 6 Compact is a single slot PXI Express system controller. This device controls all peripheral modules and chassis in 4-link configuration. It has 2 x Ethernet, 3 x USB 3.2 Type-A, 1 x DisplayPort 1.4, reset button, LED indicators on the front panel. It communicates with peripheral modules using PCIe lanes.

1.1. Key Features

- 1 x 1 Gb/s Ethernet and 1 x 2.5 Gb/s Ethernet
- 3 x USB 3.2 Type-A
- 1 x DisplayPort 1.4
- 4-Link (x4, x1, x1, x1)
- **Maximum Controller Bandwidth:** 7 GB/s
- **PCIe Link Speed:** 8 GT
- **Graphics:** Intel® Iris® Xe Graphics architecture
- **CPU:** Intel® Core™ i5-1335UE / Intel® Core™ i7-1370PE (optional)
- **Chipset:** RM590E
- **Memory:** 16 GB DDR5 5600 MT/s
- **Storage:** 1 TB M.2, NVMe SSD
- **Operating System:** Windows 11

DE140110 is compatible with IEC 60068-2-1 / IEC 60068-2-2 / IEC 60068-2-78 / IEC 60068-2-27 / IEC 60068-2-64 / EN 61326 (IEC 61326) / EN 55011 (CISPR 11) / AS / NZS CISPR 11 / FCC 47 CFR Part 15B / ICES-001 standards.

Areas of application include:

- PXIe based test systems
- LAB usage
- Modular test systems
- Automated test equipment

2. Hardware Overview

2.1. Functional Block Diagram

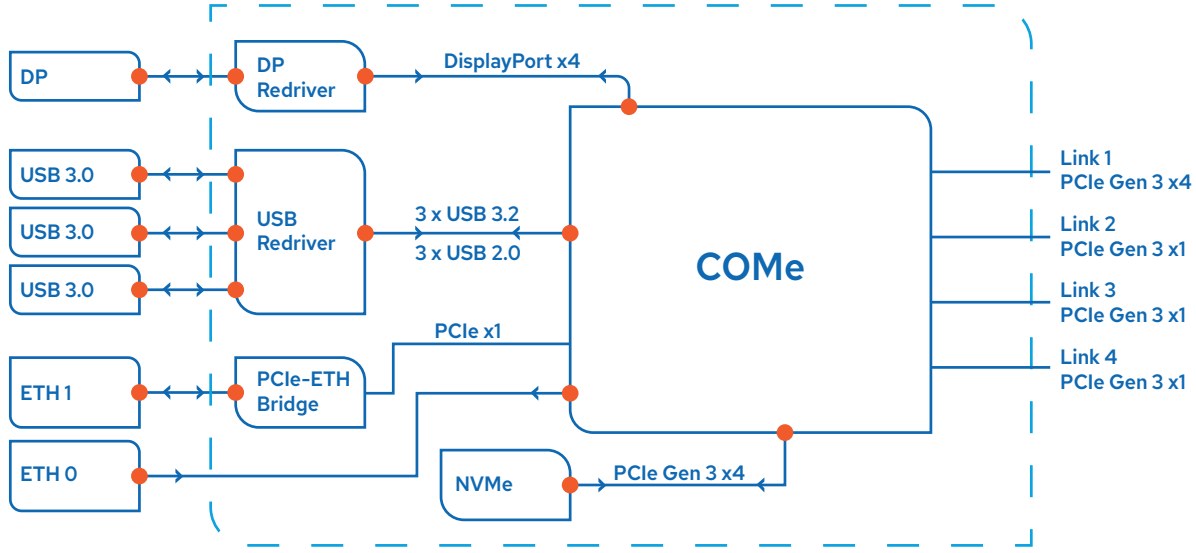


Figure 1: Chassis PCIe Connection Diagram

2.2. Hardware Specifications

2.2.1. Electrical

Table 1: Electrical Specifications

Specification	Min	Typ	Max	Notes
Current From 3.3 V	–	0.2 A	1.7 A	–
Current From 5 V	–	0.5 A	3.5 A	–
Current From 12 V	–	3 A	11.5 A	–
Current From 5 Vaux	–	0.5 A	1.7 A	–
Ethernet Data Rate	–	–	2.5 Gb/s 1 Gb/s	ETH 0 ETH 1
USB 3.2 Data Rate	–	–	10 Gb/s	–
USB 2.0 Data Rate	–	–	480 Mb/s	–
DisplayPort Version	–	DisplayPort 1.4	–	–
DisplayPort Resolution	–	–	4096 x 2304 5120 x 3200	@ 60Hz, 36 bpp @ 60Hz, 24bpp
PXI Express Link Configuration	–	4-Link	–	x4, x1, x1, x1
PCI Express Link Speed	–	8 GT/s	–	Gen 3

2.2.2. Features

Table 2: Optional Features

Features	OPT1 Description	OPT2 Description
CPU	Intel® Core™ i5-1335UE	Intel® Core™ i7-1370PE
Core	2 P-cores 8 E-cores	6 P-cores 8 E-cores
Speed	P-cores: 1.3 GHz up to 4.5 GHz Turbo E-cores: 1.1 GHz up to 3.3 GHz Turbo	P-cores: 1.9 GHz up to 4.8 GHz Turbo E-cores: 1.9 GHz up to 3.7 GHz Turbo
Cache	12 MB Intel® Smart Cache	24 MB Intel® Smart Cache
Graphics	Intel® Iris® Xe Graphics architecture with 80 EUs	Intel® Iris® Xe Graphics architecture with 96 EUs
Platform	Intel® Raptor Lake-P	Intel® Raptor Lake-P
Memory	16 GB DDR5 5600 MT/s	16 GB DDR5 5600 MT/s
Storage	1 TB M.2, NVMe SSD	1 TB M.2, NVMe SSD
Operating System	Windows 11	Windows 11

2.2.3. Physical

Table 3: Physical Specifications

Specification	Description
Dimensions (L / W)	212.23 mm x 20 mm
Height (H)	130.8 mm

2.2.4. Environmental

Table 4: Environmental Specifications

Specification	Condition	Value
Operating Humidity	Relative, non-condensing	10% - 90%
Storage Humidity	Relative, non-condensing	5% - 95%
Operating Temperature	Forced-air cooling from chassis	0 °C - +55 °C
Storage Temperature	–	-40 °C – +71 °C

3. Software Overview

This device is PXI Express compatible.

4. Signal Connections

4.1. LED Indicators

LED functions are given below.

Table 5: LED Functions

Mode	Function
DRV	Indicates when an access to the internal drive is occurring.
PWR	Indicates when the power is good.

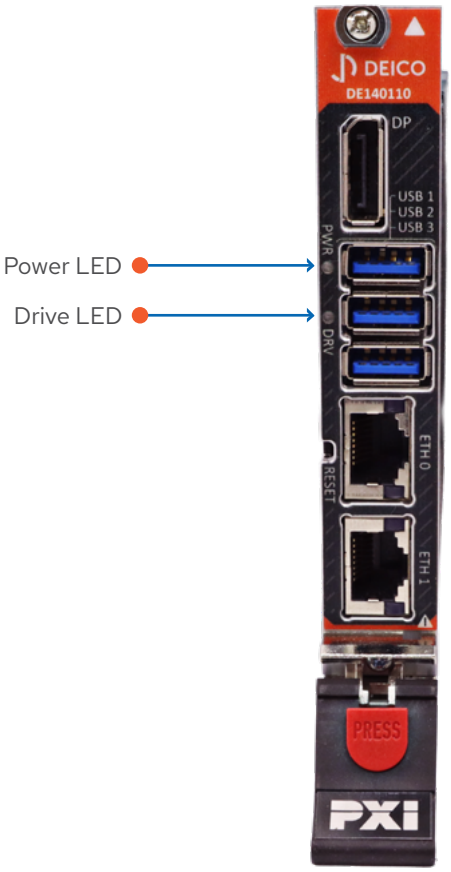


Figure 2: Front Panel View of the DE140110 Module Showing Power and Drive LEDs

5. Safety Guidelines

Caution

The DE140110 shall not be operated in any manner not specified in this document. Misuse of the product may result in a hazard. Safety protection features may be compromised if the product is damaged. In the event of damage, the product shall be returned for repair.

6. Compatibility Guidelines

This product has been tested and found to comply with the applicable regulatory requirements and limits for electromagnetic compatibility (EMC). These requirements and limits are intended to provide reasonable protection against harmful interference when the product is operated within the specified electromagnetic environment.

This product is intended for use in industrial locations. However, harmful interference may occur in certain installations if the product is connected to peripheral devices or test objects, or if it is used in residential or commercial areas. To minimize interference with radio and television reception and to prevent unacceptable performance degradation, the product shall be installed and operated in strict accordance with the instructions specified in the product documentation.

Any changes or modifications to the product not expressly approved by DEICO may void the user's authority to operate the equipment under local regulatory rules.



Caution

To ensure the specified EMC performance, the product shall be operated only with shielded cables and accessories.



Caution

To ensure the specified EMC performance, the length of any cable attached to front connectors must not be longer than 3 m (10 ft.).

7. Supporting Products & Software

DE140110 could be used with related modules.

support@**deico.com.tr**
+90 312 395 68 44